


BUILT STRONG - BUILT TOUGH

STAINLESS STEEL EQUIPMENT

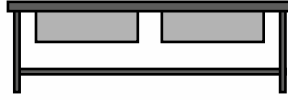

WWW.ACE-UK.COM


HEAVY DUTY
INDUSTRIAL
COMMERCIAL
MEDICAL
VETERINARY
RETAIL
WHOLESALE

COMPACT PRE RINSE WASH - PR30 - PR20

ASSEMBLY AND INSTALLATION INSTRUCTIONS

CARTON CONTENTS

1. 2 X COUPLING FLANGE ASSEMBLY DECK MOUNT
2. 1 X HOT/COLD TAP ASSEMBLY DECK MOUNT 7" (177.8mm) CC
3. 1 X DRAW OFF TAP ASSEMBLY WITH
SHORT RISER (NIPPLE) $\frac{3}{8}$ x 3" (10mm x 76mm)
4. 1 x SWIVEL ARM - **PR30** 12" (305mm)
- **PR20** 6" (152mm)
5. 1 X LONG RISER (NIPPLE) - **PR30** 24" x $\frac{3}{8}$ (610mm x 10mm)
- **PR20** 7" x $\frac{3}{8}$ (180mm x 10mm)
6. 1 X FINGER HOOK ASSEMBLY
7. 1 X WALL BRACKET AND SCREWS - **PR30** only
8. 1 X SPRING BODY
9. 1 X OVERHEAD SPRING
10. 1 X FLEXIBLE HOSE AND SPRAY VALVE ASSEMBLY (WITH $\frac{5}{8}$ " (16mm)
BLACK WASHER TO CONNECT WITH SPRING BODY)
11. 1 X HOLD DOWN RING FOR SPRAY VALVE HANDLE

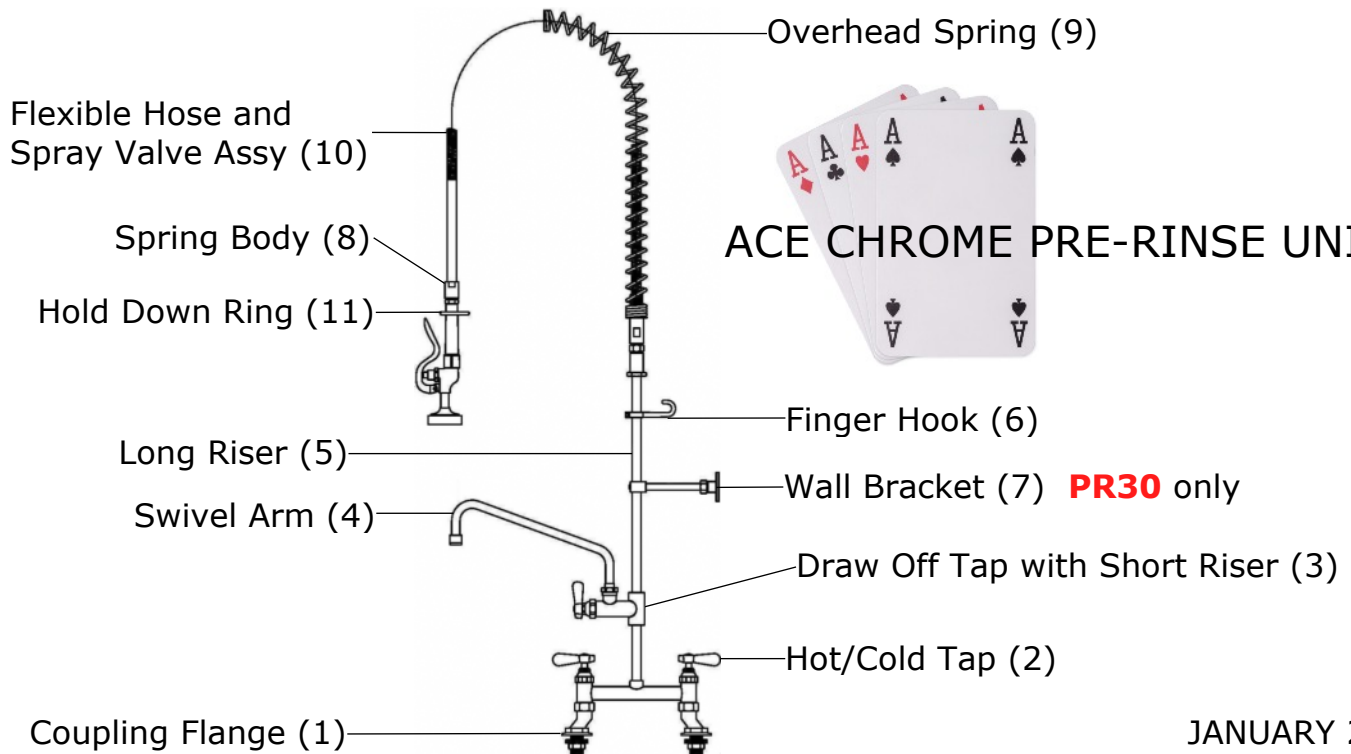

JANUARY 2016

**AMERICAN
CATERING
EQUIPMENT**

AMERICAN CATERING EQUIPMENT (UK) LIMITED
5 CHANTRY COURT
SOVEREIGN WAY
CHESTER WEST
CHESTER CH1 4QN
UNITED KINGDOM
TELEPHONE: 44 (0) 1244 381281
FAX: 44 (0) 1244 381700
OFFICE: FSE@ACE-UK.COM
PARTS: PARTS@ACE-UK.COM
WEBSITE: WWW.ACE-UK.COM



COMPACT PRE RINSE WASH - PR30 - PR20

ASSEMBLY AND INSTALLATION INSTRUCTIONS

FLUSH SUPPLY LINE AND SHUT OFF WATER SUPPLY
WATER PRESSURE MAX 75PSI/5 BAR MIN 22PSI/1.5BAR
WATER TEMPERATURE MAX 55°C/130°F (HOT TAP)
USE PIPE JOINT COMPOUND OR TEFLON TAPE FOR ALL THREADED JOINTS
ENSURE ALL JOINTS ARE TIGHT - **DO NOT OVERTIGHTEN**

1. Fit Coupling Flange Assembly (1) to Hot/Cold Tap Assembly (2)
2. Fit Draw Off Tap with Short Riser Assembly (3) to Hot/Cold Tap Assembly (2)
3. Fit Swivel Arm (4) to Draw Off Tap(3)
4. Fit Long Riser (5) to Draw Off Tap Assembly (3)
5. Open Clamp on Finger Hook (6) so that it will slide down Long Riser (5) without damage to fit approximately halfway down the Riser - Hook upward - **DO NOT TIGHTEN AS YET**
6. Fit the Assembly (1-6) onto the Sink using Plumbers Putty and secure with Brass Fittings and Washers provided
7. Fit the Wall Bracket Flange (7) with Wall Mount Screws approximately 3" to 4" (75mm to 100mm) below the Spring Body (8) - **PR30 ONLY**
8. Ascertain correct length of Support Rod (7) from Wall Bracket to Riser and cut to size. Secure Rod to Wall Bracket Flange and Tighten - **PR30 ONLY**
9. Secure Rod Clamp to Riser (5) - **PR30 ONLY - DO NOT TIGHTEN AS YET**
10. Remove the Spring Body (8) from the Flexible Hose (10) and fit onto the top of the Long Riser (5). This will also tighten the Long Riser (5) onto the Draw Off Tap Assembly (3)
11. Tighten Finger Hook Clamp (6)
12. Tighten Support Rod Clamp (7) - **PR30 ONLY**
13. Slide Hold Down Ring (11) over Flexible Hose (10) and on to Spray Valve Lever
14. Insert the Flexible Hose through the Overhead Spring (9) at the Curved End. Ensure the Black Sealing Washer is in position and fit the Flexible Hose/Spray Valve Assembly (10) on to the Spring Body (8)

FULLY TEST TO ENSURE NO LEAKS
CHECK ANY FLEXIBLE HOSE CONNECTIONS TO ENSURE NO KINKS
SHUT OFF DECK TAPS WHEN PRE RINSE SPRAY IS NOT IN USE

AMERICAN
CATERING
EQUIPMENT

AMERICAN CATERING EQUIPMENT (UK) LIMITED
5 CHANTRY COURT
SOVEREIGN WAY
CHESTER WEST
CHESTER CH1 4QN
UNITED KINGDOM
TELEPHONE: 44 (0) 1244 381281
FAX: 44 (0) 1244 381700
OFFICE: FSE@ACE-UK.COM
PARTS: PARTS@ACE-UK.COM
WEBSITE: WWW.ACE-UK.COM

